



**WHAT'S HAUNTING
YOUR BATHROOM?**





**I'm that lingering smell,
makes life a living hell!**

This sickening monster represents the trapped bathroom stink that never seems to leave our bathroom space.

**Like a broken record
always spreading discord**

This witch symbolises a noisy exhaust fan that fails to remove foul odours, but excels in disturbing our peace.



**Smells like botanicals
but really high doses
of chemicals!**

This deceitful creature represents the air fresheners we use! Concealing unpleasant odours with harmful chemicals is not the solution.






THESE
DEMONS
WILL HAUNT
YOUR BATHROOM...
NO MORE!

Eliminates unpleasant bathroom odour and stale air without the need for harmful chemical air fresheners.

Removes steam and moisture from the shower area, inhibiting the growth of mould, mildew and germs.

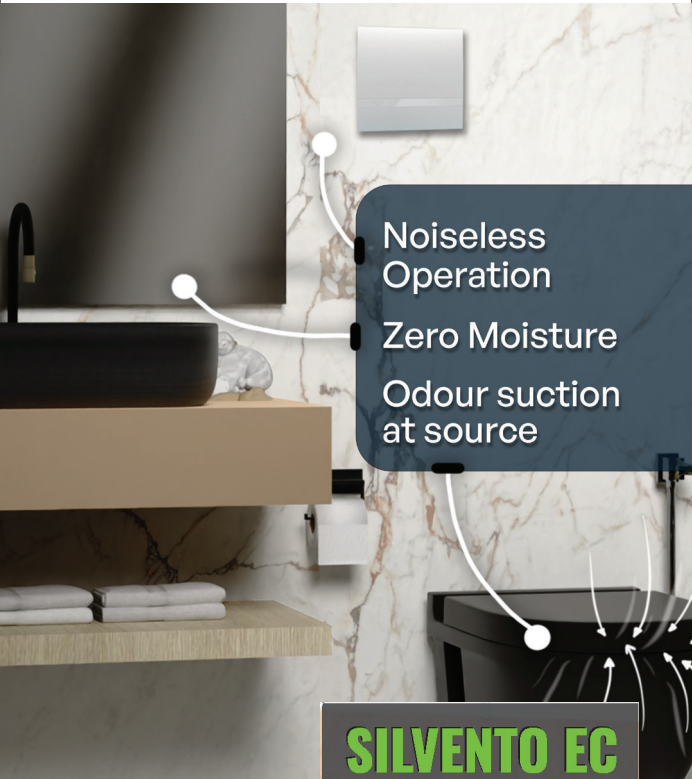

Noiseless
Operation

Zero Moisture


Odour suction
at source

SILVENTO EC

The Revolutionary
Air Flushing System

LUNOS
energy-efficient

Made in Germany

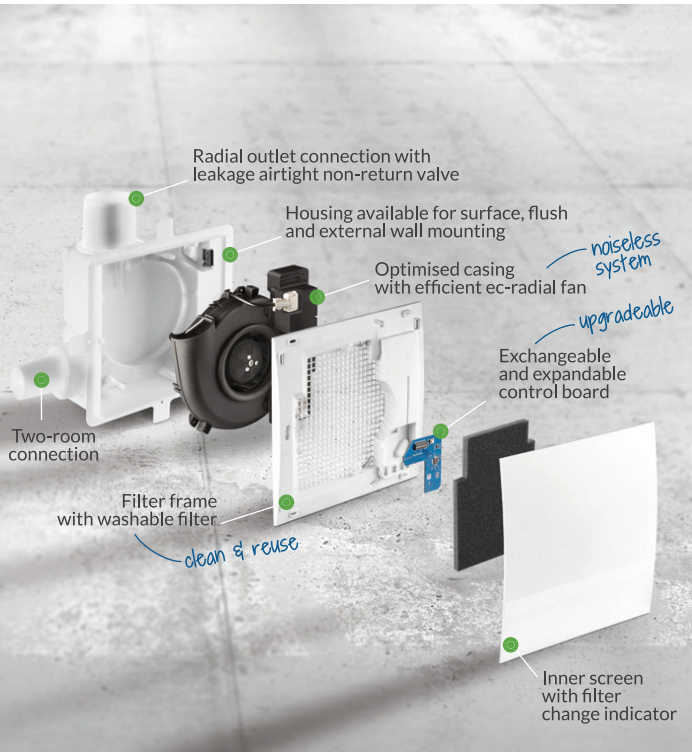

SILVENTO EC

One motor - endless solutions

Determine the functions of the Silvento EC simply by selecting the control board:

Basic board: Seven ventilation stages from 15 to 90 m³/h with time lag interval switching and switch on delay configurable

Comfort board: Basic board plus humidity and temperature sensor

Both boards can each be combined with a plug-in expansion module:

Movement sensor module: With radar-based sensor

Wireless module: Control via wireless without further cabling

The sound power level is only 18 dB(A) at 15 m³/h (basic ventilation) and 52 dB(A) at 90 m³/h (demand ventilation)

Dimensions: Surface-mounted with 260 x 260 x 108mm (WxHxD) cover with 260 x 260 x 23mm and flush mounted housing with 235 x 235 x 92mm

SILVENTO EC TECHNICAL DATA

Silvento-Typ V-EC ¹⁾ oder KL-EC ²⁾	Basic board 5/EC-ZI (90)	Comfort board 5/EC-FK (90)
Volume flow	0/15/20/30/40/45/ 50/60/(90) m ³ /h	0 - 60 (90) m ³ /h
Sound power level L _w ³	from 18 dB(A)	
Power consumption ³	1,8 - 6,2 (14,5) W	
Supply voltage	200 - 240 V AC 50/60 Hz	
Control voltage	0 - 10 V	
Protection class	IPX5	


- 1) Silvento V are ventilator inserts that still require a flush or surface-mounted housing.
- 2) Silvento KL are complete single-pipe fans that are clamped in pre-wall constructions.
Silvento KL single-pipe fans fit into the flush-mounted housings of the LUNOS Skalar series.
- 3) Free blowing Sound power level: The sound power level indicates how "loud" a unit is.
The value is independent of the distance.

Recommendation

LUNOS recommends the use of the newly developed diagnostic software as an extension of the scope of functions and for the use of logging functions.

Lunos Air Flushing System
Price : Rs.39900.00

SILVENTO EC TECHNICAL DRAWING

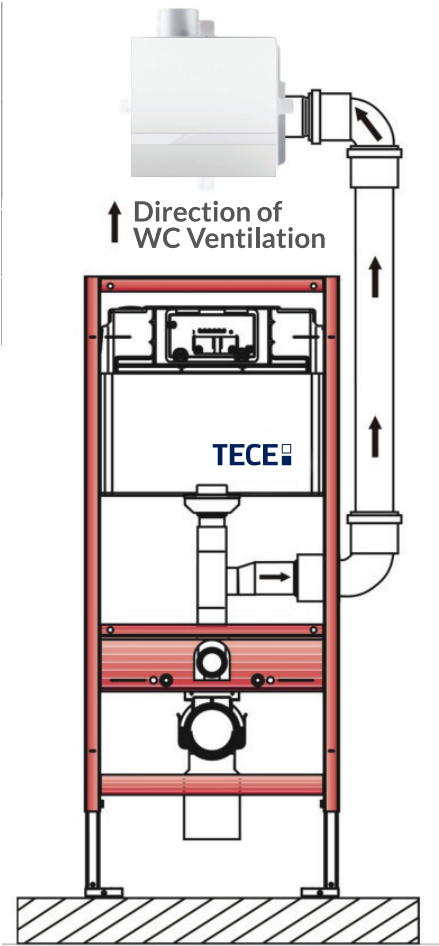



Tap to connect



Brought to you by
MODERNIZING TRENDS PVT. LTD.

Email: info@modernizingtrends.com
Website: lunos.modernizingtrends.com